








LINE  
Lynx

SYSTEM  
EXCLUSIVE 10

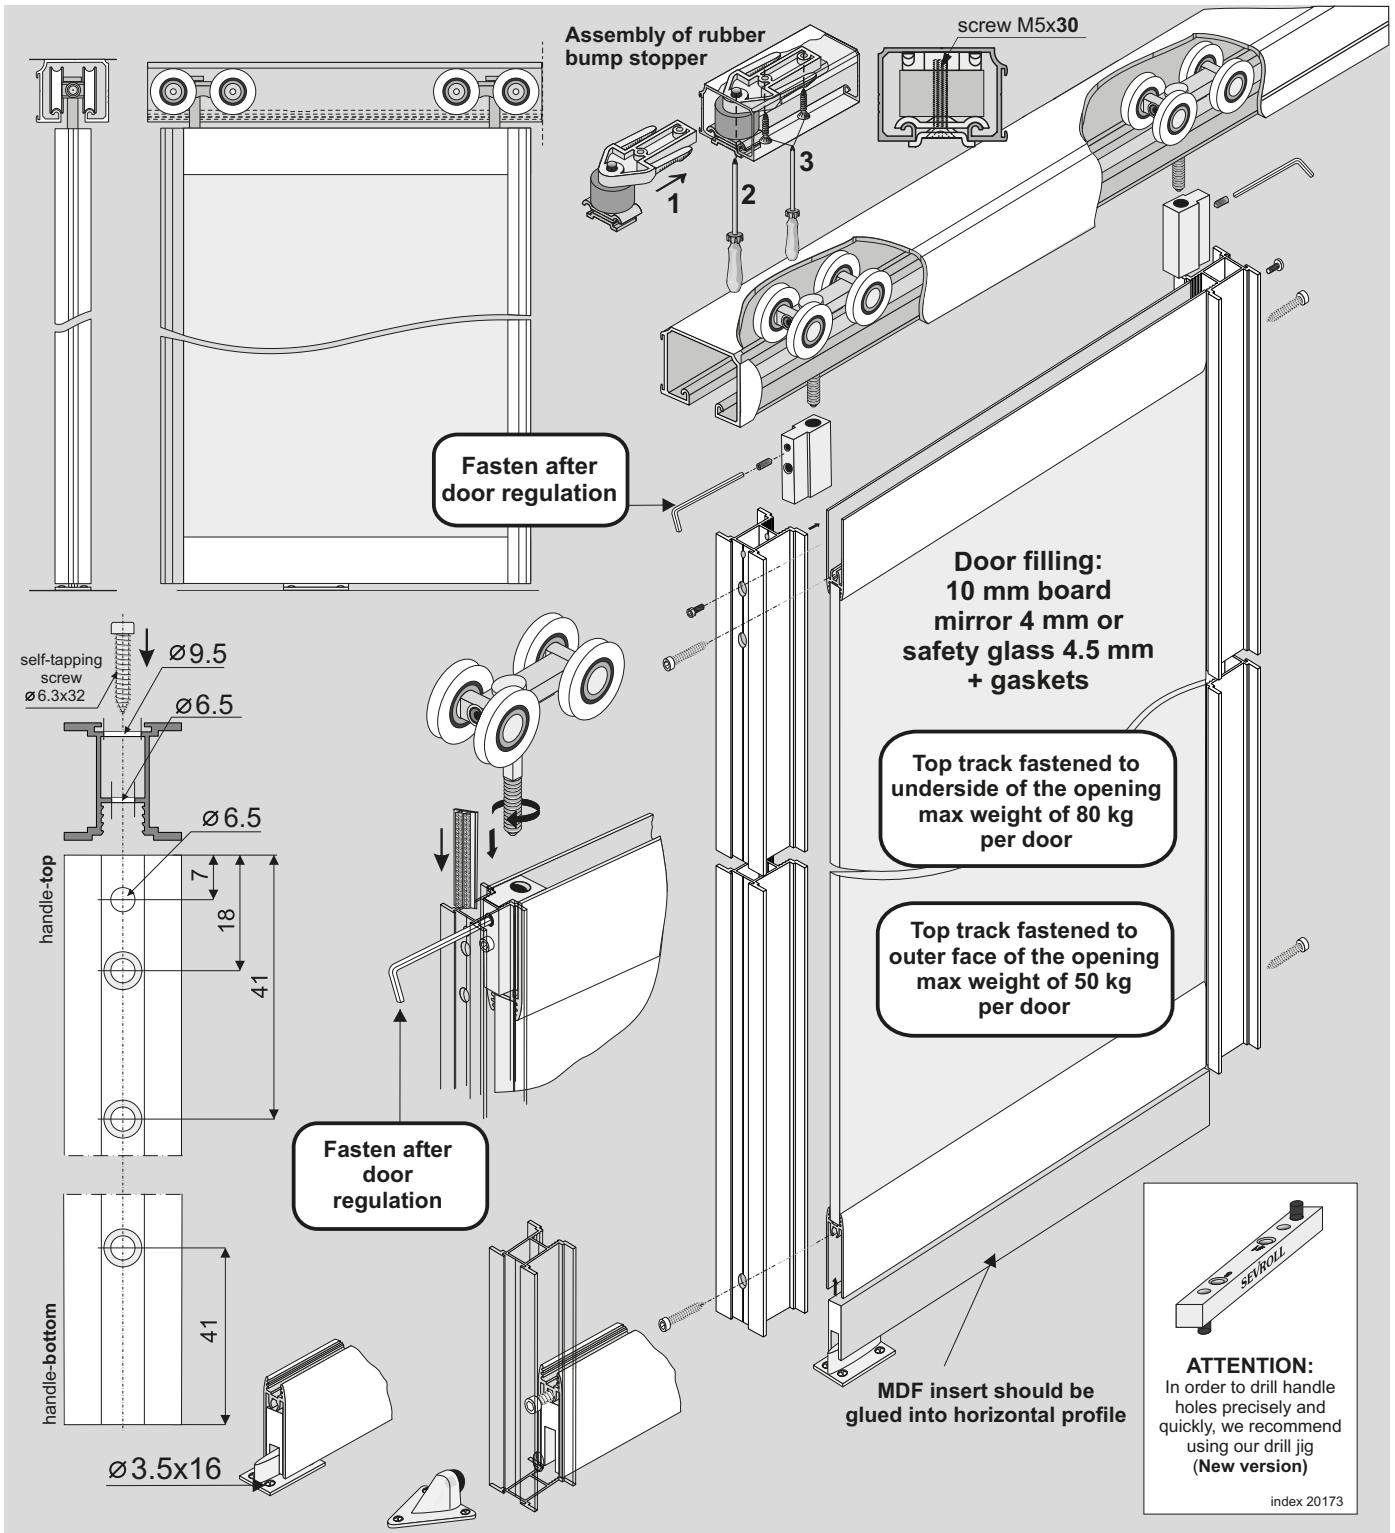


### COMPONENTS

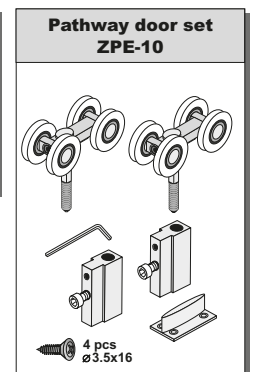

*You must remember to purchase self-tapping screws to construct each door (4 screws per door). When using safety glass or mirror, you must also remember to purchase gaskets.*

**1. Track within the opening**


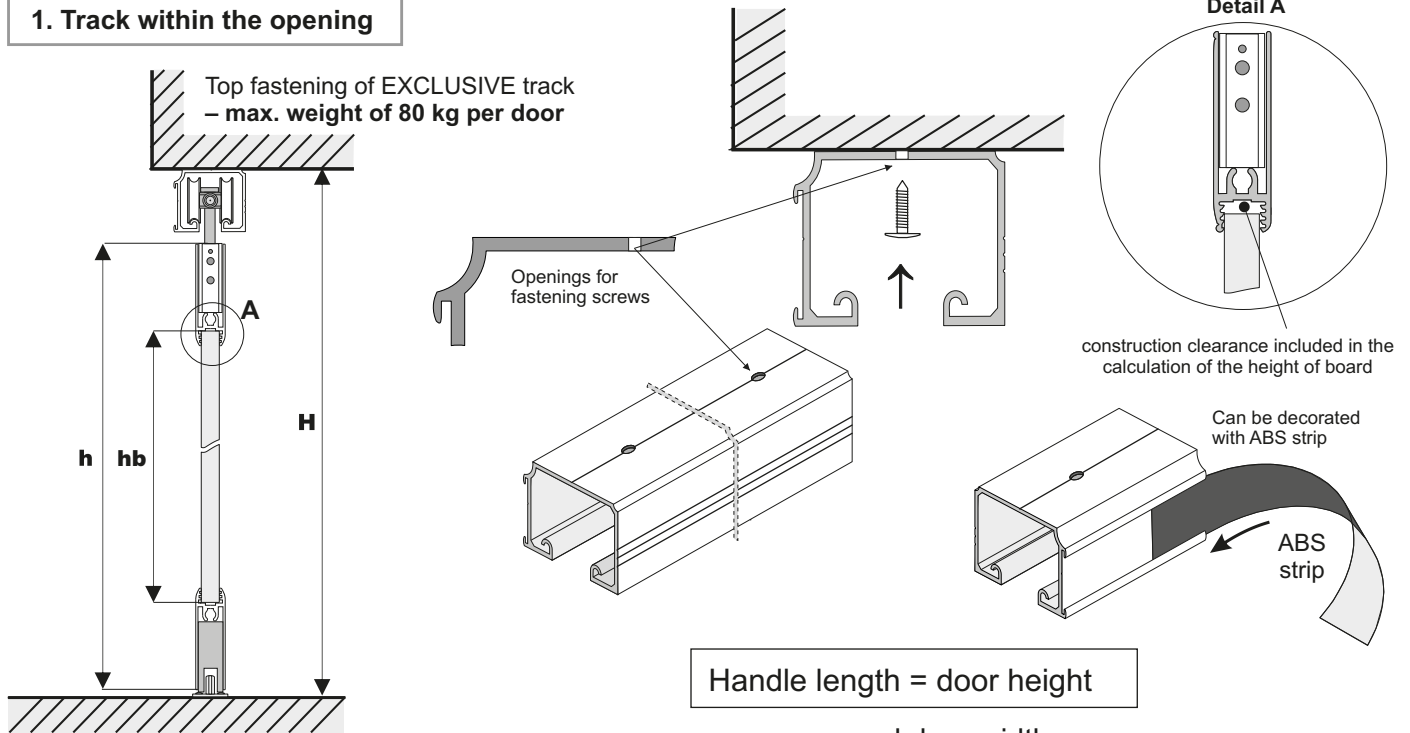


Handle length = door height

wz - assumed door width

door height	- h	$h = H - 46 \text{ mm}$
board height	- hb	$hb = h - 97 \text{ mm}$
board width	- wb	$wb = wz - 41 \text{ mm}$
horizontal profile length	- L	$L = wz - 58 \text{ mm}$
mirror height	- hm	$hm = hb$
mirror width	- wm	$wm = wb - 4 \text{ mm}$

**2. Track outside the opening**

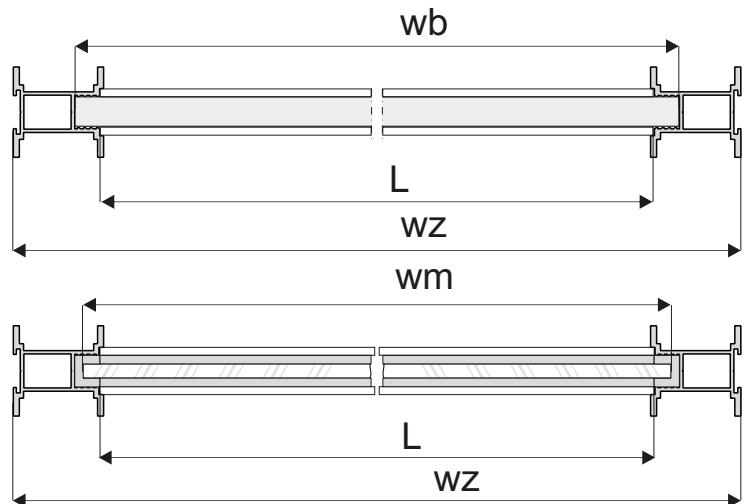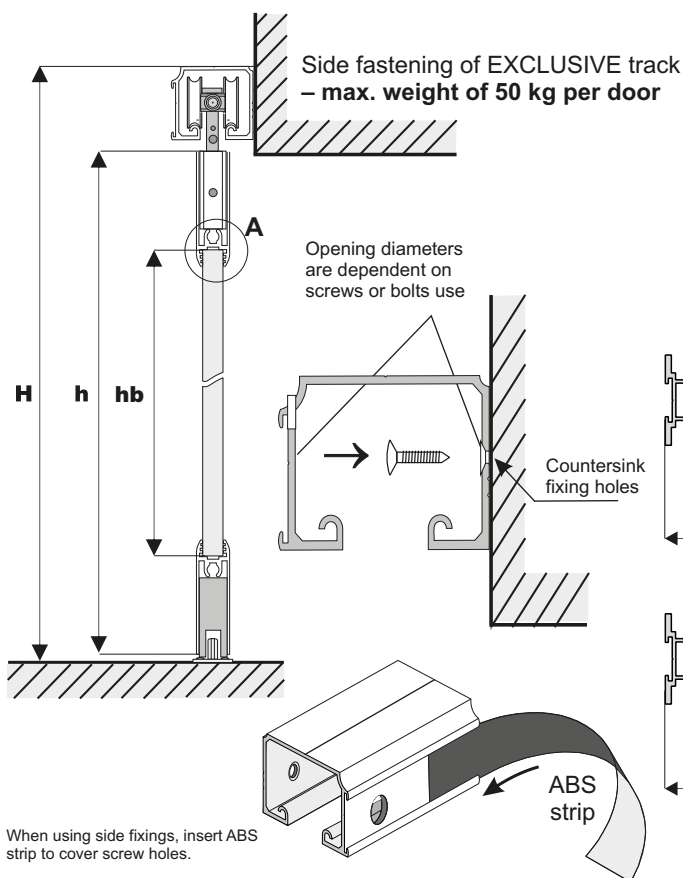

**ATTENTION!**

In cases that it will not be possible to insert carriages after the installation of the top track, carriages should be inserted prior to track installation.

**ATTENTION!**

Mirror (4 mm) should be used with a safety backing film. Safety glass (4.5 mm) comprises of two thin layers with a film in-between. Both mirror and glass need fitting gaskets.

**ATTENTION!**

Remove protective film from aluminium elements (handles, tracks, connectors, etc.) prior to cutting them to the desired size. Film removal will reveal quality issues (eg. scratches)