


**COMPONENTS**

<p><b>Handle 10-ka II</b></p> <p>L: 2.70 m</p> <p>textile door stop 14 mm x 4 mm</p>	<p><b>Top track Exclusive</b></p> <p>L: 1.20 m, 1.80 m, 3.00 m, 3.60 m</p>	<p><b>Set for folding doors ZSE-10 (or ZSE-10 PLUS with clip hinge)</b></p>				
<p><b>Bottom track First</b></p> <p>L: 1.20 m, 1.80 m, 3.00 m, 3.60 m</p>	<p><b>Horizontal profile Decor</b></p> <p>L: 1.70 m, 2.35 m, 3.00 m</p>	<p>top carriage</p>	<p>top hinge seat</p>	<p>bottom hinge seat</p>	<p>round slide</p>	<p>3x furniture hinge</p> <p>12x self-tapping screw 3.9 x 13 (furniture hinge)</p> <p>allen key 2</p>

**You must remember to purchase self-tapping screws 6.3x32 to construct each door (4 screws per door).  
When using safety glass or mirror, you must also remember to purchase gaskets.**


Dimensions of opening

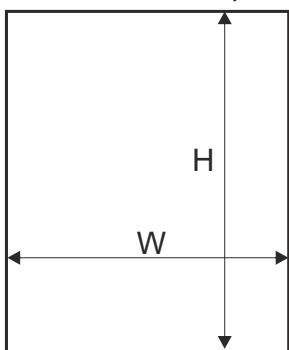

handle length = door height

door filling - # 10 mm board

door height	- h	$h = H - 52 \text{ mm}$
board height	- hb	$hb = h - 97 \text{ mm}$
door width	- w	$w = (W - 8 \text{ mm}) : 2$
board width	- wb	$wb = w - 36 \text{ mm}$
horizontal profile length	- L	$L = w - 53 \text{ mm}$

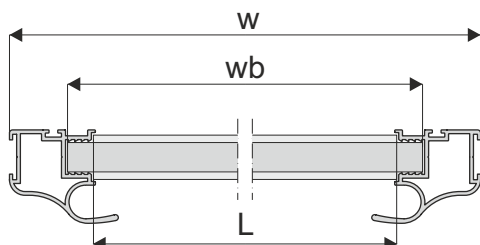

mirror or safety glass dimensions


mirror height	- hm	$hm = hb$
mirror width	- wm	$wm = wb - 4 \text{ mm}$

**ATTENTION!**




**Mirror (4 mm) should be used with a safety backing film. Safety glass (4.5 mm) comprises of two thin layers with a film in-between. Both mirror and glass need fitting gaskets.**

Installation method for fitting 10 mm board (diag. A) and 4 mm mirror or glass (diag. B)

- with handle



- with horizontal profile

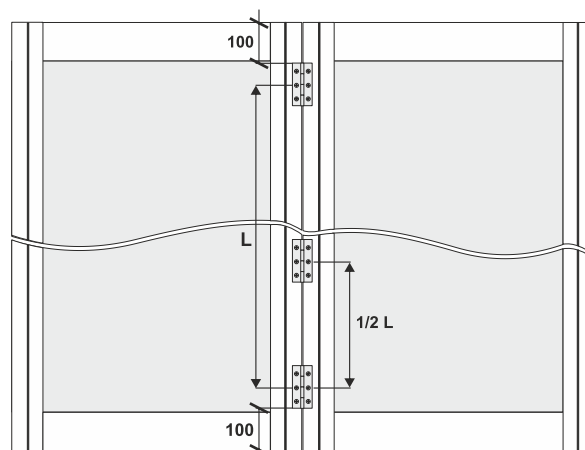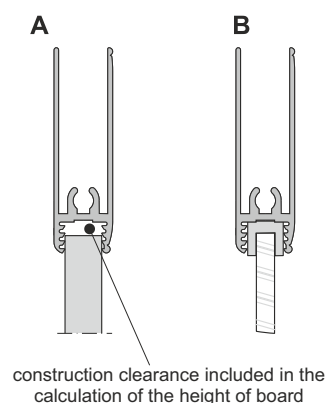

When fixing hinges, doors should be touching one another. Do not use textile door stop in between the touching handles!