


Invisible overlay hinge SECRET

for aluminum frames and wooden doors, with soft-close


SEVROLL

D - thickness of carcass side
 A - overlay (A = D - S)
 K - cup distance (3 to 6 mm)
 S - gap



S	D=18	D=20	D=22	D=24	D=26	D=28	D=30	D=32
K = 3	0	0.2	0.6	1	2.3	4.9	7.5	10
K = 4	0	0.2	0.6	1	1.5	3.9	6.5	9
K = 5	0	0.2	0.6	1	1.5	2.9	5.5	8
K = 6	0	0.2	0.6	1	1.5	1.9	4.5	7

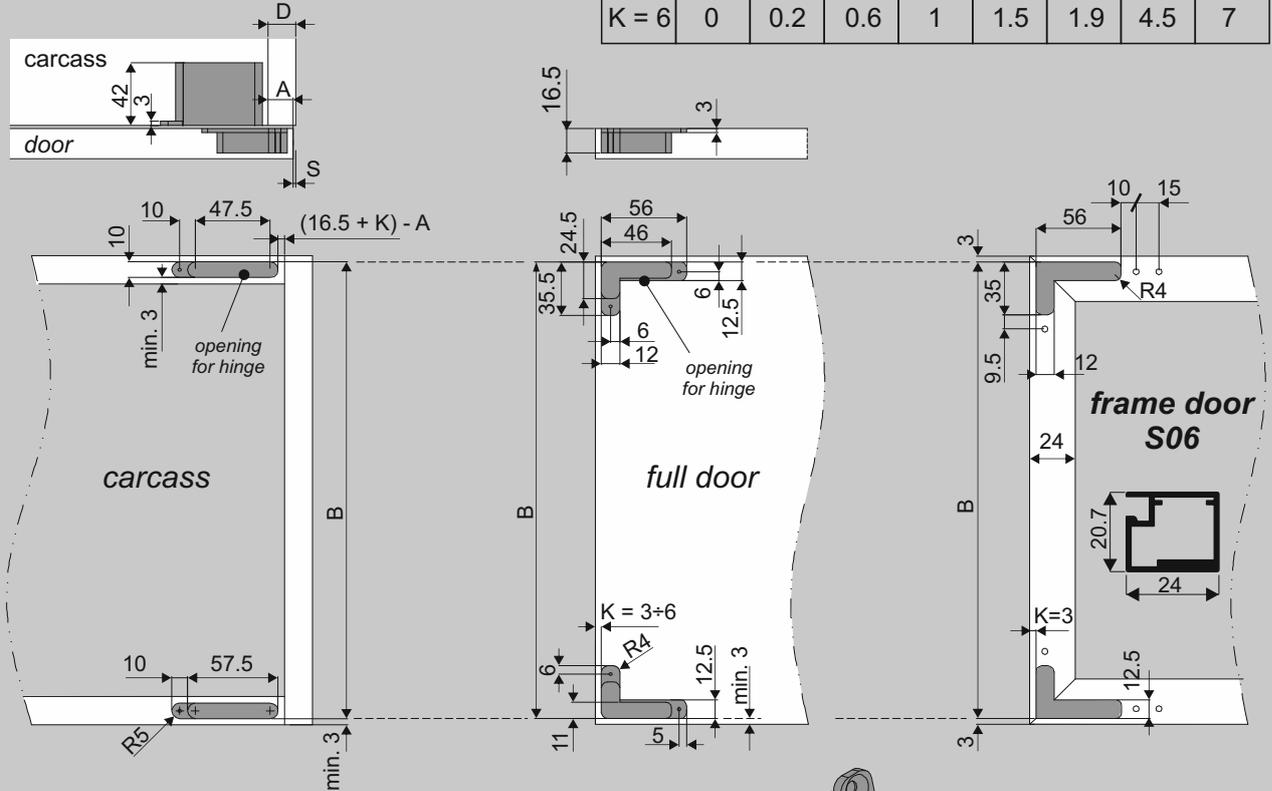


Full overlay hinge, soft-close
 Maximum door weight **20 kg**
 Maximum door height **2100 mm**
 Maximum door width **600 mm**
 Opening angle **105°**

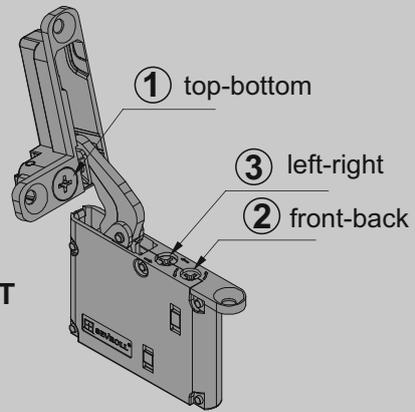


HINGE ADJUSTMENT

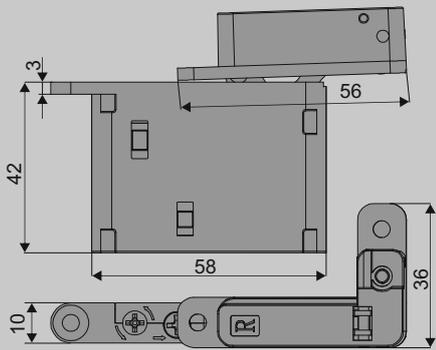

top-bottom
 ± 1.3 mm



front-back
 ± 2 mm



left-right
 ± 2 mm

COMPONENTS

Invisible overlay hinge SECRET
 for aluminum frames and wooden doors, with soft-close

Aluminum frame connector
 for hinge SECRET and S06 frame

ADDITIONAL COMPONENTS

SECRET hinge arm pocket