Assembly of soft-close in track

1

Soft-slose must be aligned with bumper

Lock soft-close position

Fix catch on door in the appropriate position to the installed soft-close

2

3

Regulation of catch height
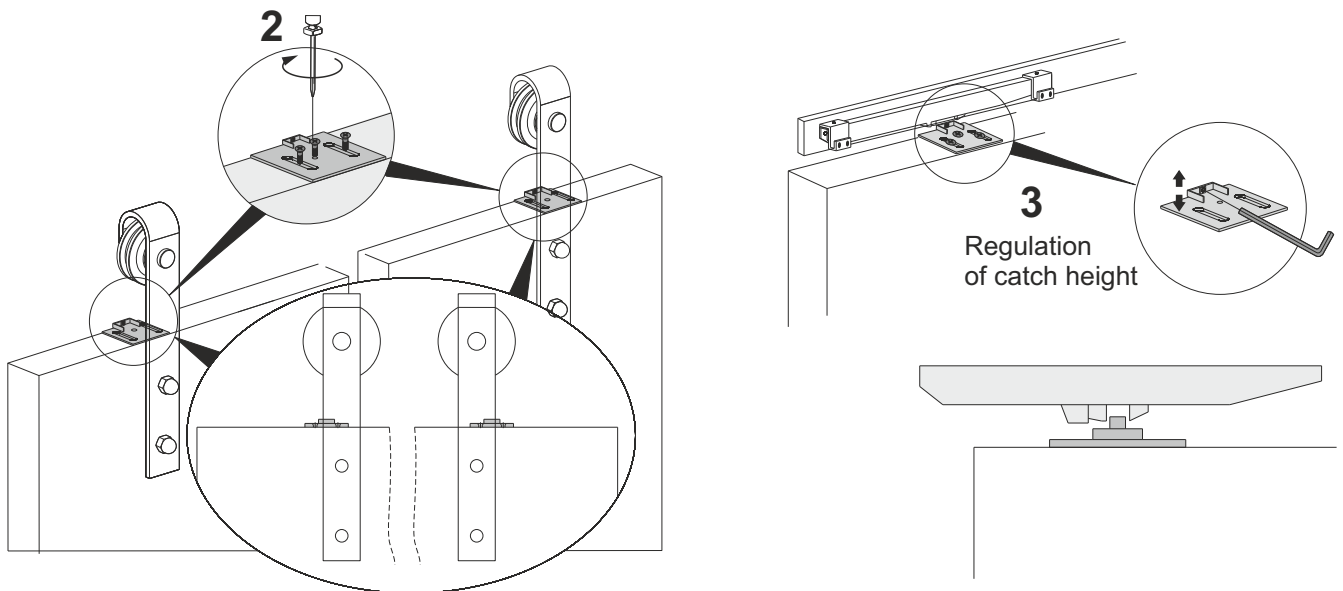
COMPONENTS

Soft-close Loft 80 kg					
x1	x1	x1	x8	x2	4x25 x6