








LINE
EXCLUSIVE

SYSTEM
EXCLUSIVE BOARD

 **SEVROLL®**

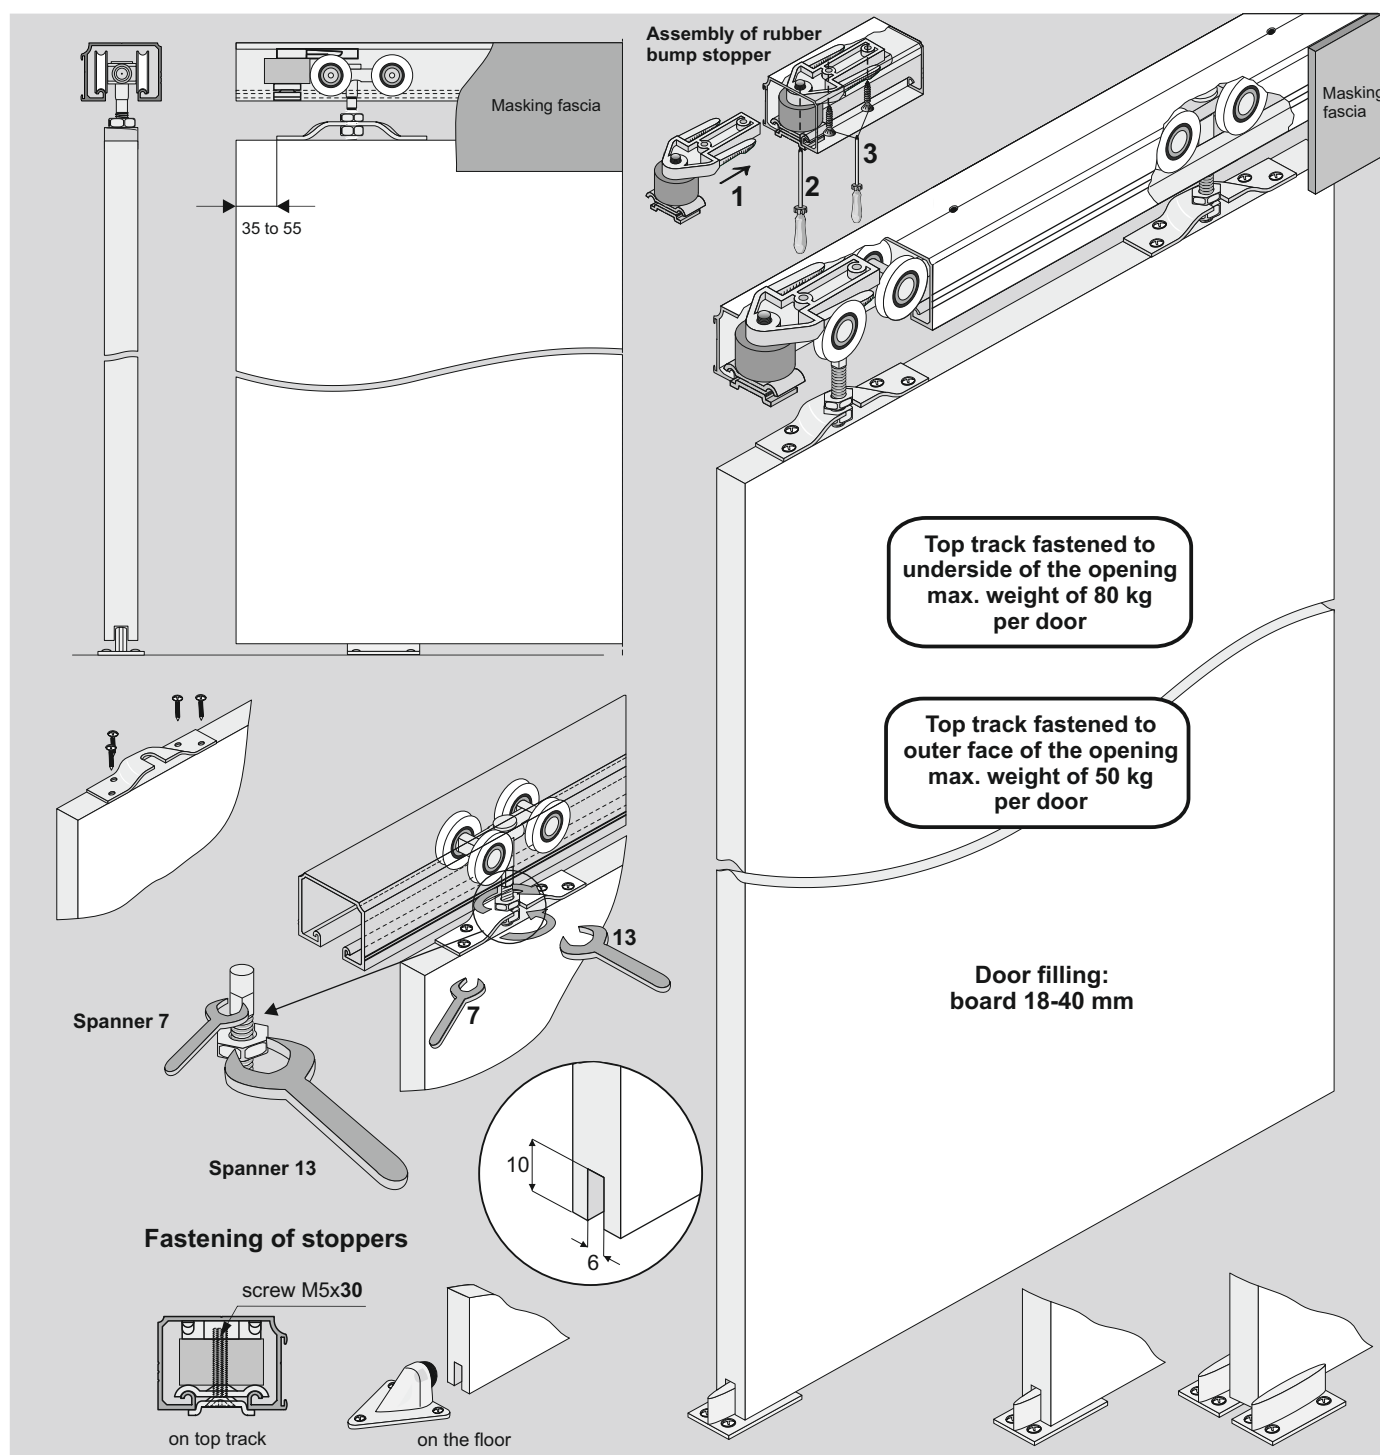

COMPONENTS

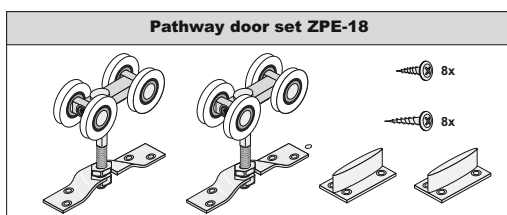






1. Track within the opening

Top fastening of EXCLUSIVE track
– max. weight of 80 kg per door

Board height h_b :

$$h_b = H - 64 \text{ mm}$$



H - door height

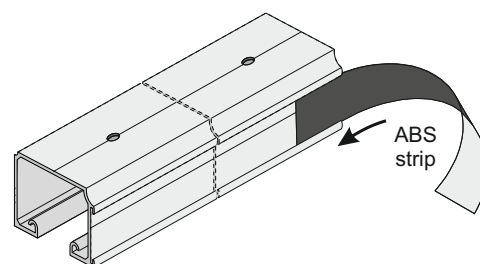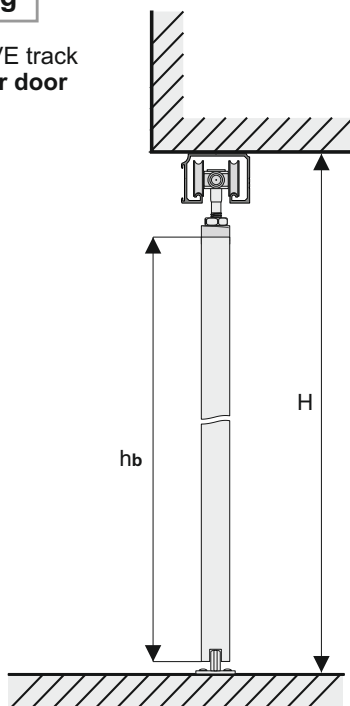

ABS strip

2. Track outside the opening

Side fastening of EXCLUSIVE track
– max. weight of 50 kg per door

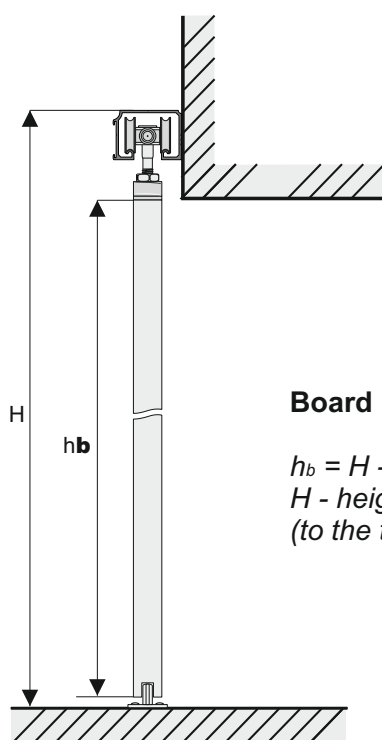


Opening diameters
are dependent on
screws or bolts use.

Countersink
fixing holes


Board height h_b :

$$h_b = H - 64 \text{ mm}$$

H - height outside the opening
(to the top of the track)

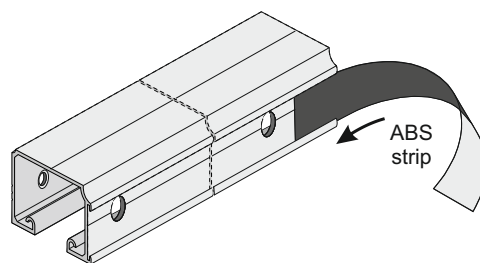

ABS strip

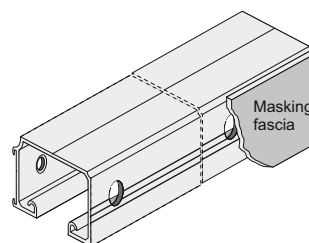

Masking
fascia

ATTENTION!

In cases that it will not be possible to insert
carriages after the installation of the top track,
carriages should be inserted prior
to track installation.

ATTENTION!

Remove protective film from aluminium elements (handles, tracks, connectors, etc.) prior to cutting them to the desired size.
Film removal will reveal quality issues (eg. scratches)