




SYSTEM

COMPACT


SEVROLL

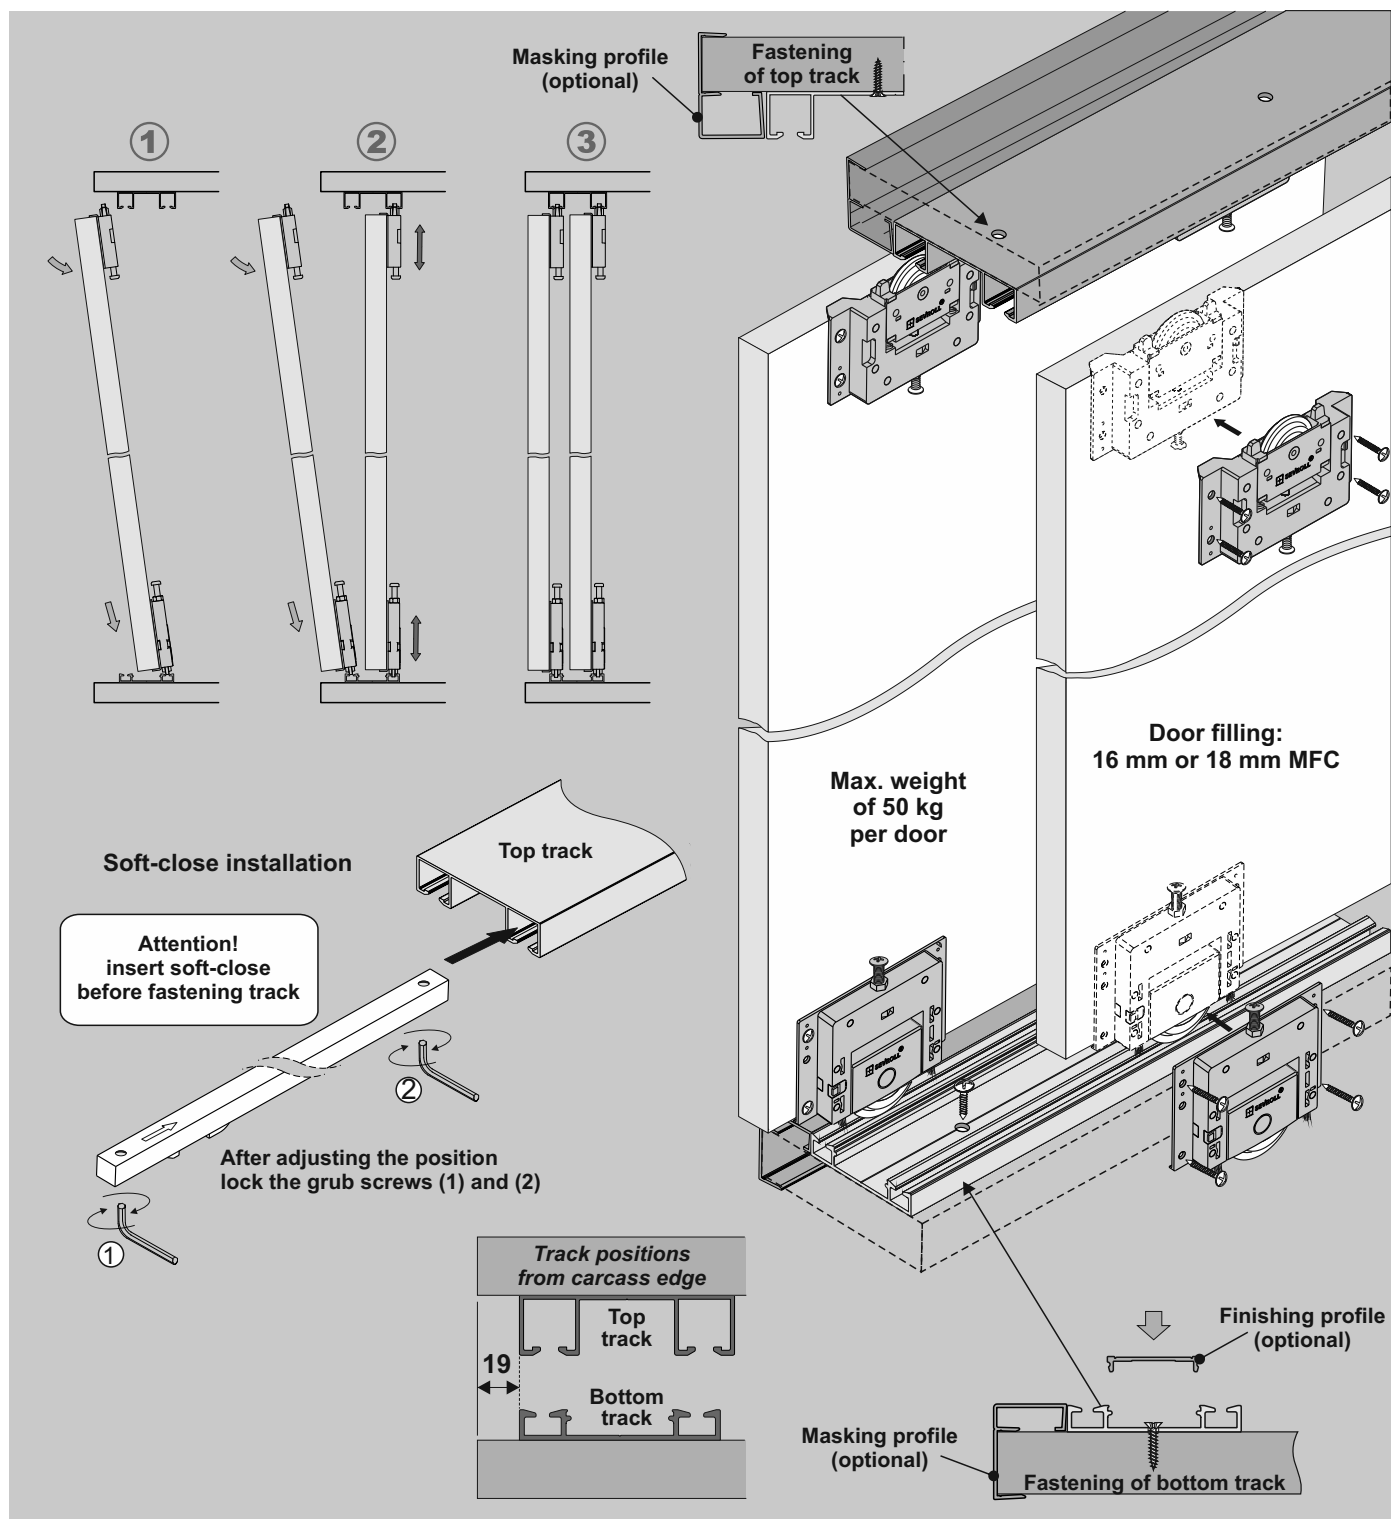



COMPONENTS

Top track Compact	Bottom track Compact II	Finishing profile for bottom track Elegant II	Top track masking profile Compact	Bottom track masking profile Compact	Set Compact (1 door)	Soft-close Compact
L: 1.70 m, 2.35 m, 3.00 m, 6.00 m	L: 1.70 m, 2.35 m, 3.00 m, 6.00 m	L: 1.70 m, 2.35 m, 3.00 m, 6.00 m	L: 1.70 m, 2.35 m, 3.00 m, 6.00 m	L: 1.70 m, 2.35 m, 3.00 m, 6.00 m	Top guide Bottom carriage	
					 x2 x2	 x2 x1
					 Ø4x14 x 16	Allen key 2 mm

1. Door installation

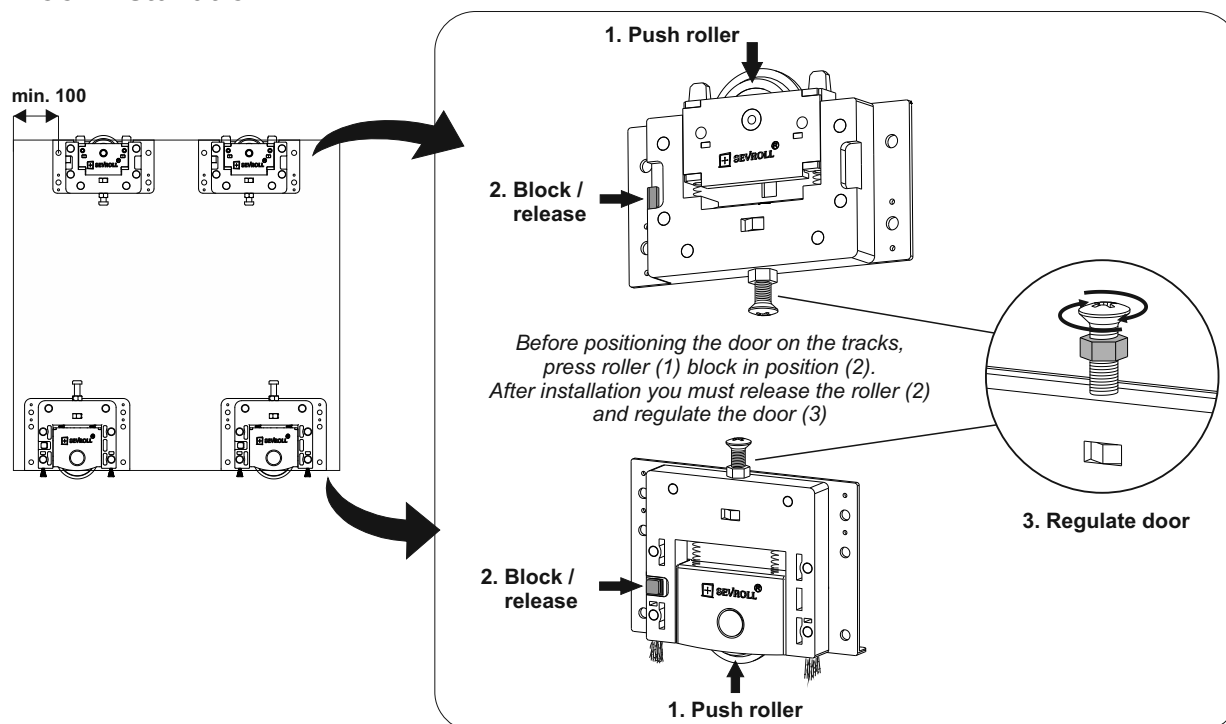


Dimensions of opening

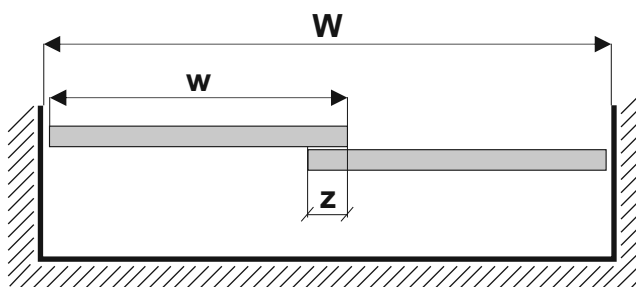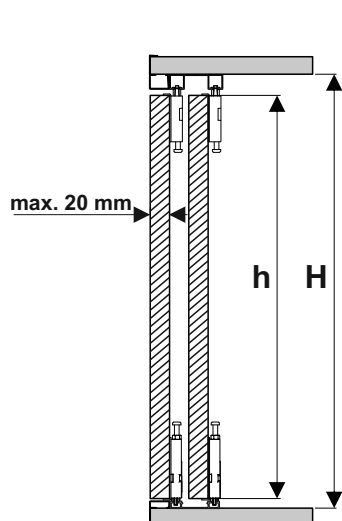

door height	- h	$h = H - 35 \text{ mm}$
board height (1 mm PVC edging)	- hb	$hb = h - 2 \text{ mm}$
door width	- w	$w = (W + Z) : N$
board width (1 mm PVC edging)	- wb	$wb = w - 2 \text{ mm}$

number of doors	- N	2	3
total overlap	- Z	30	60

Warning! When using masking profiles carcass sides should protrude a min. of 3 mm



ATTENTION! Remove protective film from aluminium elements (handles, tracks, connectors, etc.) prior to cutting them to the desired size. Film removal will reveal quality issues (eg. scratches)