



COMPONENTS















You must remember to purchase self-tapping screws to construct each door (4 screws per door). When using safety glass or mirror, you must also remember to purchase gaskets.

GEMINI, JULIA, KARAT, LYNX, ROMEO / EXCLUSIVE 10 F SEVROLL



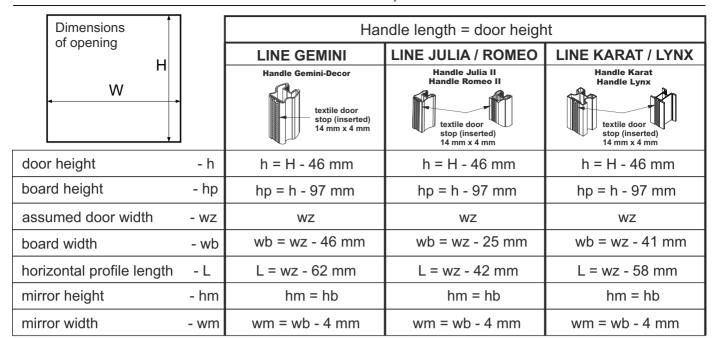





Side fastening of EXCLUSIVE track

max. weight of 50 kg per door

Opening diameters


with ABS strip

ABS

strip

are dependent on screws or bolts use

1. Track within the opening

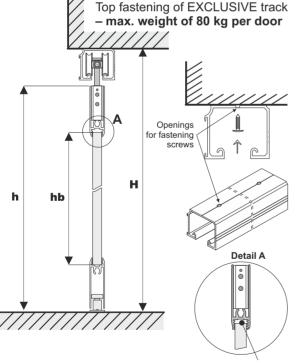

2. Track outside the opening

h hb Countersink fixing holes Can be decorated

construction clearance included in the calculation of the height of board

ATTENTION!

Mirror (4 mm) should be used with a safety backing film. Safety glass (4.5 mm) comprises of two thin layers with a film in-between. Both mirror and glass need fitting gaskets.

When using side fixings, insert ABS strip to cover screw holes.

In cases that it will not be possible to insert carriages after the installation of the top track, carriages should be inserted prior to track installation.