




LINE

VITARA / SYSTEM


SYSTEM

GEMINI 10

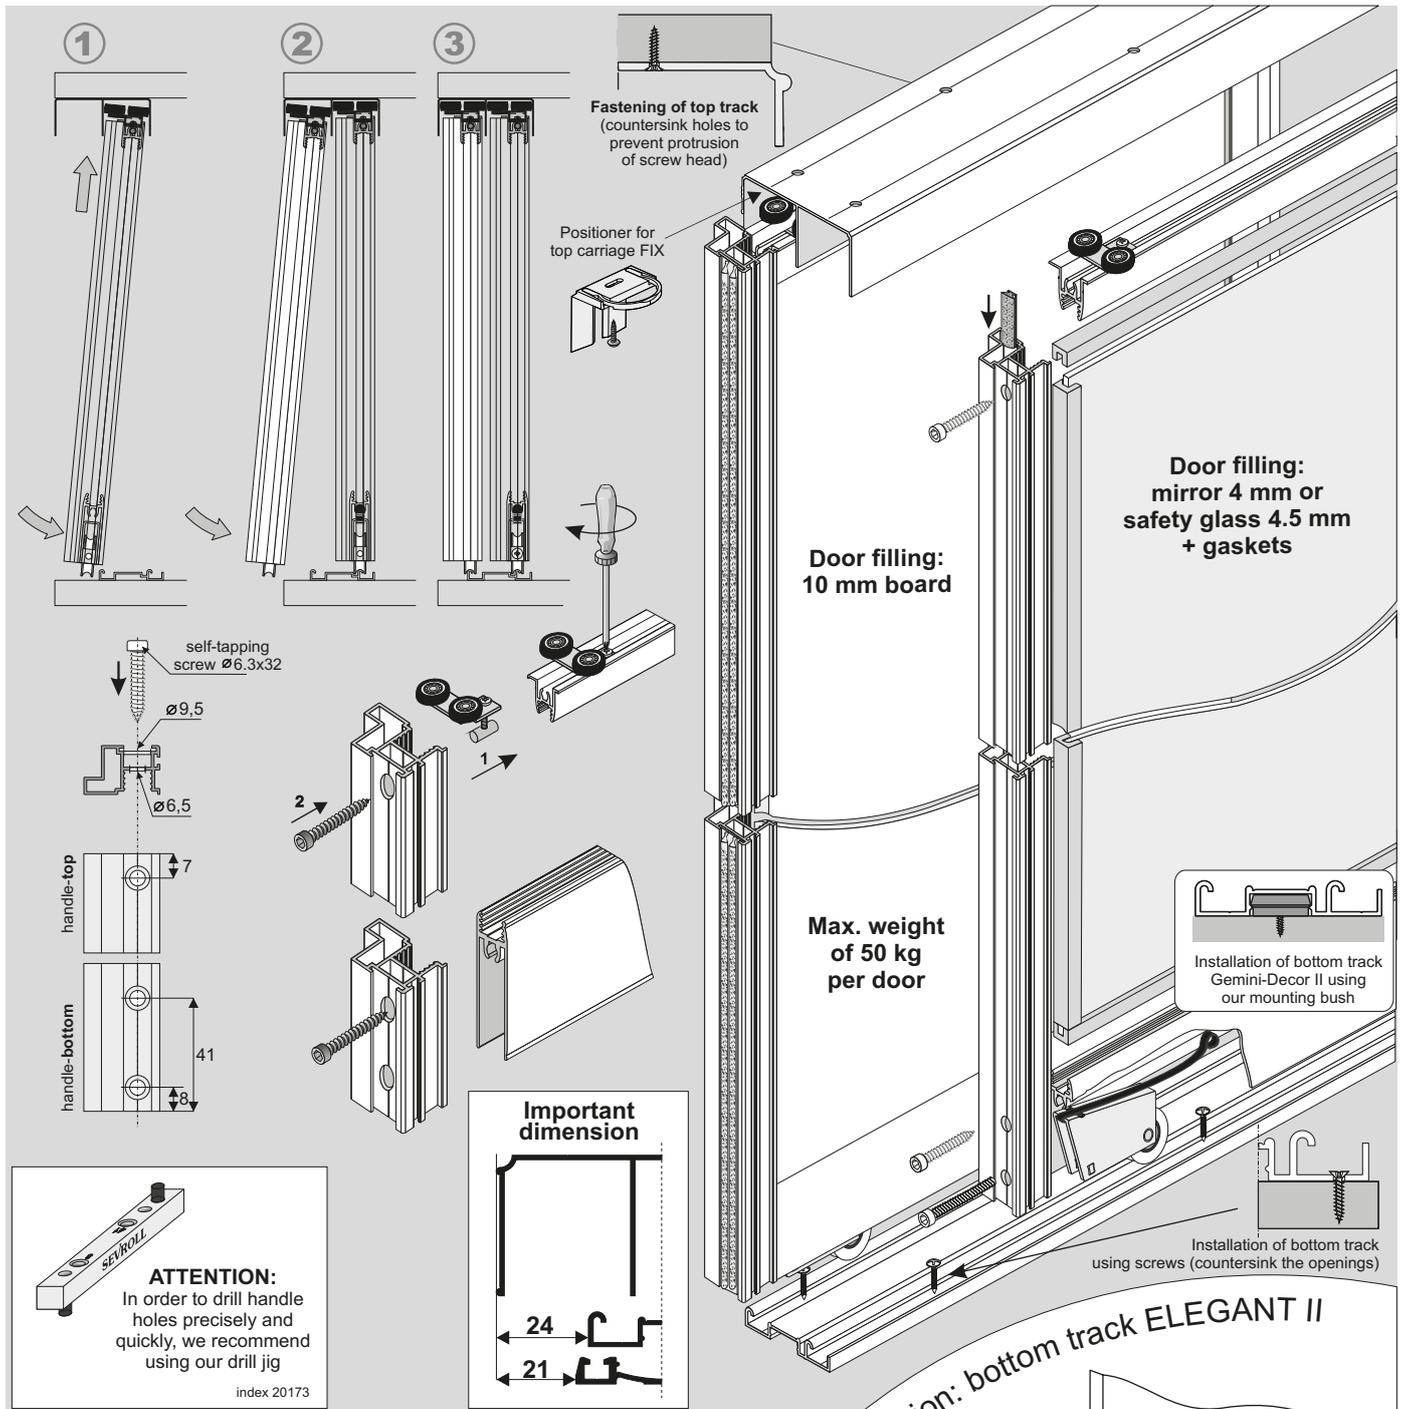


COMPONENTS

Handle Vitara




Length: 2.7 m

Top track Gemini-Decor II




Length: 1.7 m, 2.35 m, 3.0 m, 4.05 m, 6.0 m

Bottom track Gemini-Decor II



Length: 1.7 m, 2.35 m, 3.0 m, 4.05 m, 6.0 m


Guiding carriage 10-ka



Lower horizontal profile Decor (A)

Length: A, B
1.7 m, 2.35 m, 3.0 m

Upper horizontal profile Decor (B)



Bottom carriage WD10C HI-TEC



With Vitara set you may also use bottom track **Elegant II** with covering strip along with bottom carriage **WD 10V HI-TEC**. **Fitting measurements are not affected.**

Bottom carriage WD10V HI-TEC




Stopper HI-TEC

Fastening of bottom track (special screw)

You must remember to purchase self-tapping screws to construct each door (4 screws per door). When using safety glass, you must also remember to purchase gaskets.

Dimensions of opening

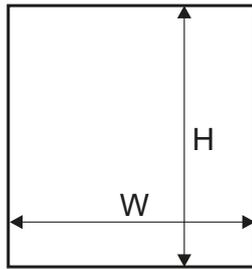

door filling:

- # 10 mm board,
- # 4 mm mirror or
- # 4.5 mm safety glass



Handle length = door height

door height	- h	$h = H - 40 \text{ mm}$
door wing height with soft-close fitted	Mini SV25/40/60, SV-25/50	$h = H - 40 \text{ mm}$
	Top SV60/80, Central SV25/40	$h = H - 44 \text{ mm}$
board height	- hb	$hb = h - 64 \text{ mm}$
door width	- w	$w = (W - 3 \text{ mm} + Z) : N$
board width	- wb	$wb = w - 20 \text{ mm}$
lower horizontal profile length	- L	$L = U = w - 36 \text{ mm}$
upper horizontal profile length	- U	
mirror height	- hm	$hm = hb$
mirror width	- wm	$wm = wb - 4 \text{ mm}$

number of doors	- N	2	3	4	5
total overlap	- Z	20 mm	39 mm	59 mm	78 mm


visual design – 4 wings

	$w = (W - 3 + 59) : 4$
	$w = (W : 2 + 17) : 2$

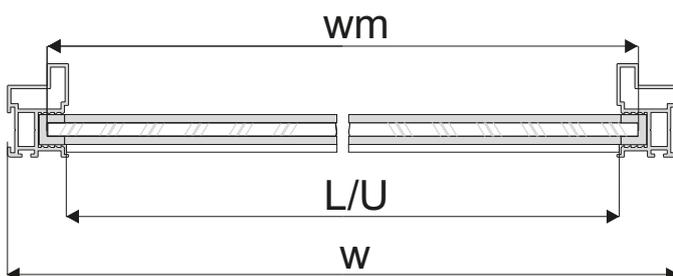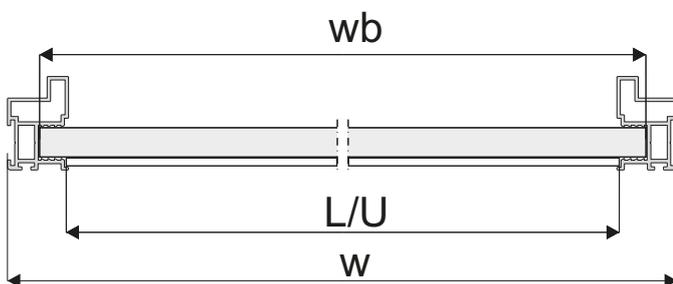


Installation method for fitting 10 mm board (diag. A) and 4 mm mirror or glass (diag. B)

- with handle

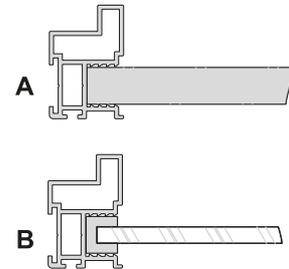


- with upper profile

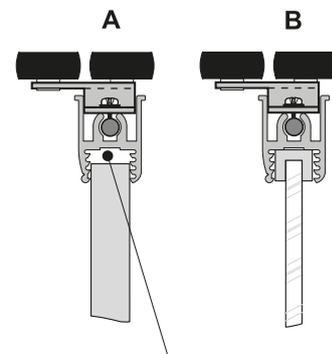

construction clearance included in the calculation of the height of board

- with lower profile

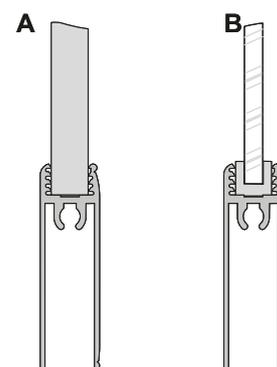

ATTENTION!

Mirror (4 mm) should be used with a safety backing film. Safety glass (4.5 mm) comprises of two thin layers with a film in-between. Both mirror and glass need fitting gaskets.

ATTENTION!

Remove protective film from aluminium elements (handles, tracks, connectors, etc.) prior to cutting them to the desired size. Film removal will reveal quality issues (eg. scratches)