



COMPONENTS

Frame Line	
L: 2.70 m	L: 2.70 m
SECRET LINE II	SLIM LINE

Inset hinge (cup ø 35 mm, hole spacing 45 mm) with clip on and soft close
x4 pcs

Magnetic catch
x2

Textile door stop 4.8 mm x 4 mm	
	
self-adhesive (SECRET LINE II)	inserted (SLIM LINE)

Screws
screw 2.5x16 (frame) x 14 pcs



LINE


SYSTEM

DR SECRET LINE, DR SLIM LINE / DR FRAME LINE

SEVROLL

Dimensions of opening



		LINE SECRET LINE II	LINE SLIM LINE
		textile door stop (self-adhesive) 4.8 mm x 4 mm	textile door stop (inserted) 4.8 mm x 4 mm
door height	- h	$h = H - 6 \text{ mm}$	$h = H - 6 \text{ mm}$
board height	- hb	$hb = h - 3 \text{ mm}$	$hb = h - 6 \text{ mm}$
single door system	door width	- w	$w = W - 6 \text{ mm}$
			$w = W - 6 \text{ mm}$
two door system	door width	- w	$w = (W - 9 \text{ mm}) : 2$
			$w = (W - 8 \text{ mm}) : 2$
board width	- wb	$wb = w - 3 \text{ mm}$	$wb = w - 6 \text{ mm}$

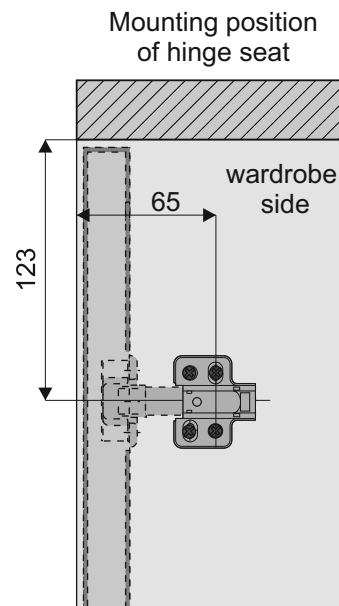

Max. weight of
4 kg per 1 hinge

The weight 1 m² of 18 mm board = 13 kg

Method for positioning hinge recesses

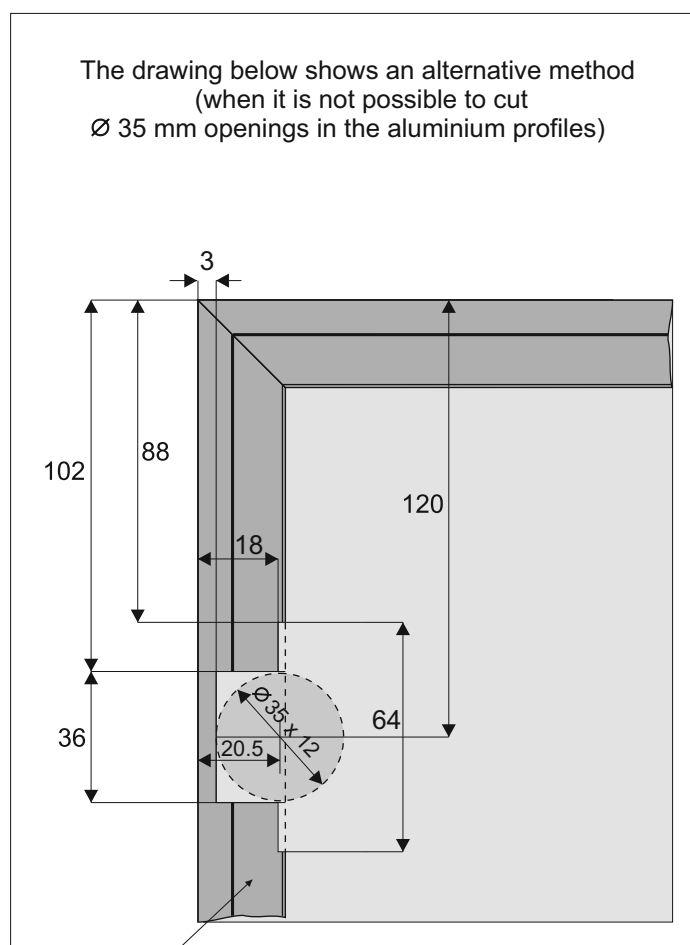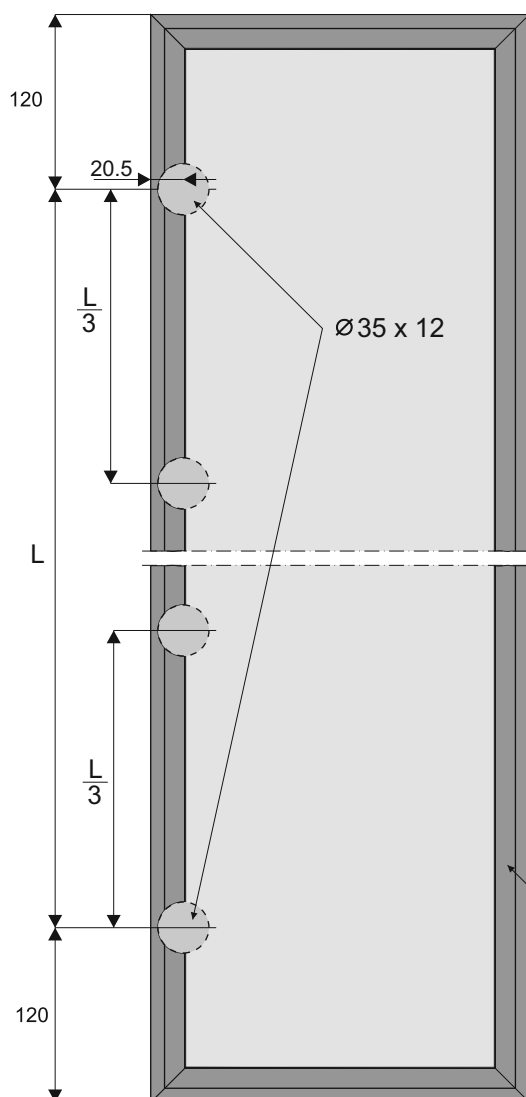

Frame SECRET LINE II or SLIM LINE

ATTENTION!

Remove protective film from aluminium elements (handles, tracks, connectors, etc.) prior to cutting them to the desired size. Film removal will reveal quality issues (eg. scratches)