

Invisible overlay hinge SECRET

for aluminum frames and wooden doors, with soft-close

SEVROLL


D - thickness of carcass side

A - overlay ($A = D - S$)

K - cup distance (3 to 6 mm)

S - gap


S	D=18	D=20	D=22	D=24	D=26	D=28	D=30	D=32
K = 3	0	0.2	0.6	1	2.3	4.9	7.5	10
K = 4	0	0.2	0.6	1	1.5	3.9	6.5	9
K = 5	0	0.2	0.6	1	1.5	2.9	5.5	8
K = 6	0	0.2	0.6	1	1.5	1.9	4.5	7

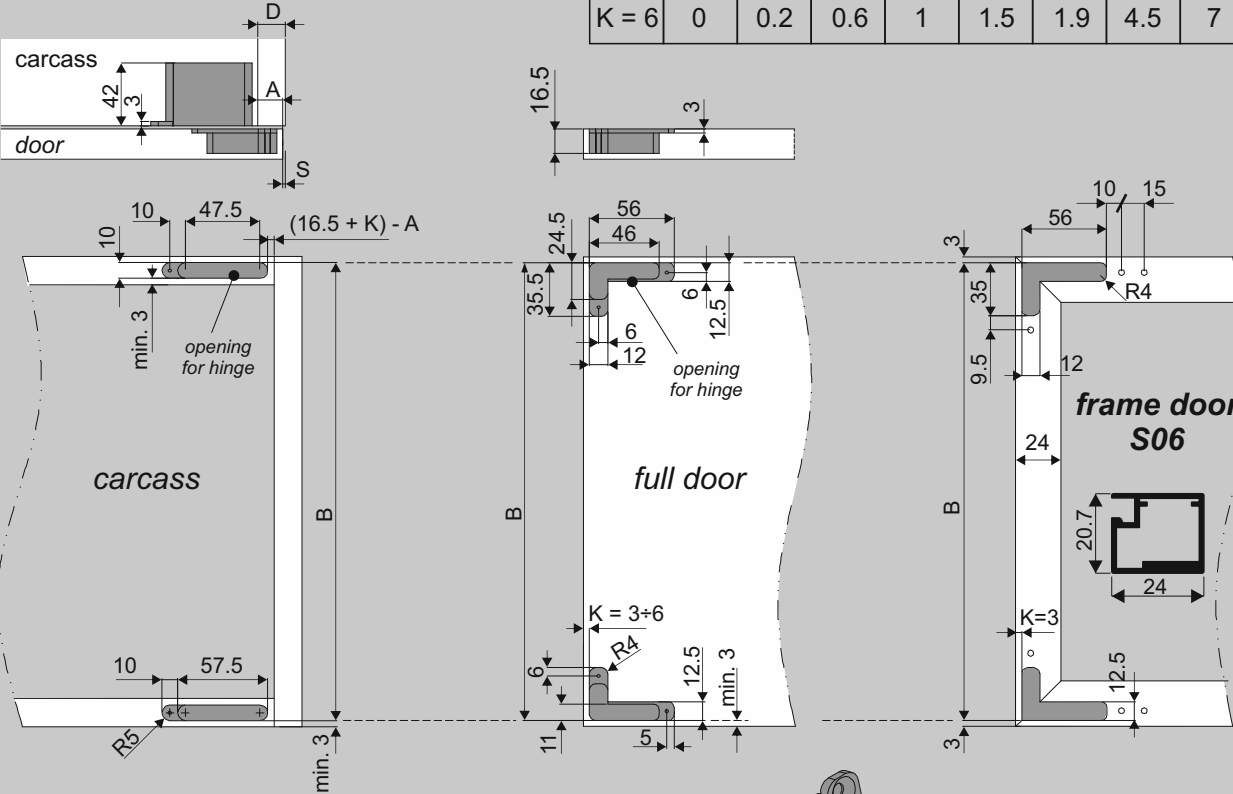



Full overlay hinge, soft-close

Maximum door weight 25 kg

Opening angle 105°

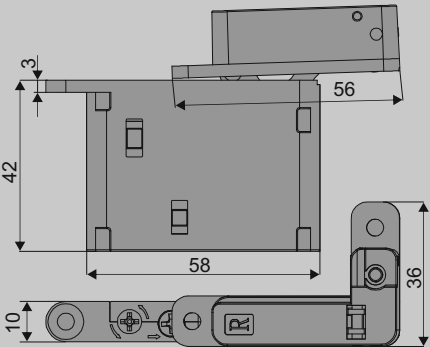


HINGE ADJUSTMENT

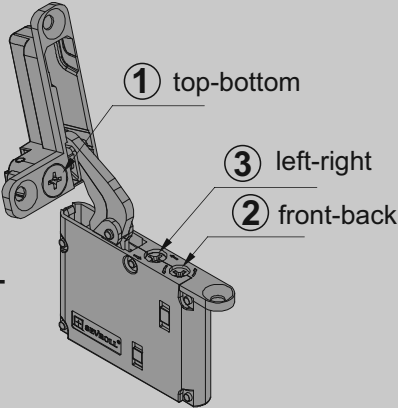


top-bottom

± 1.3 mm



front-back

± 2 mm



left-right

± 2 mm

COMPONENTS

Invisible overlay hinge SECRET
for aluminum frames and wooden doors, with soft-close

x1

x1

x6

x4

Aluminum frame connector
for hinge SECRET and S06 frame

x2

x2

x12

ADDITIONAL COMPONENTS

SECRET hinge arm pocket

x2

x6

x2