




UNDERMOUNT DRAWER SLIDES DXP-D2-3D SYNCHRO

SEVROLL


WITH PUSH OPEN AND FIXING FOR SYNCHRONISING BAR

Maximum load for slides: 30 kg
 Slide lengths: 250, 300, 350, 400, 450, 500, 550 mm
 Height adjustment: 0 to 3 mm
 Depth adjustment: 0 to 4 mm
 Width adjustment: 0 to 1.5 mm


NL - nominal length of slide
 LT - internal cabin depth
 Drawer side thickness: 18 mm

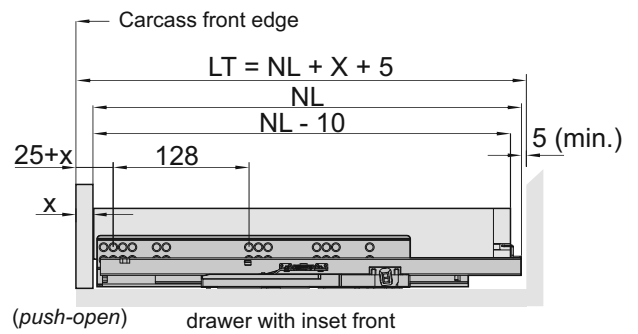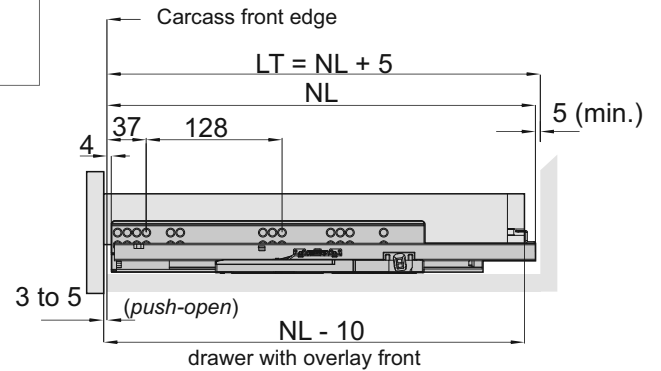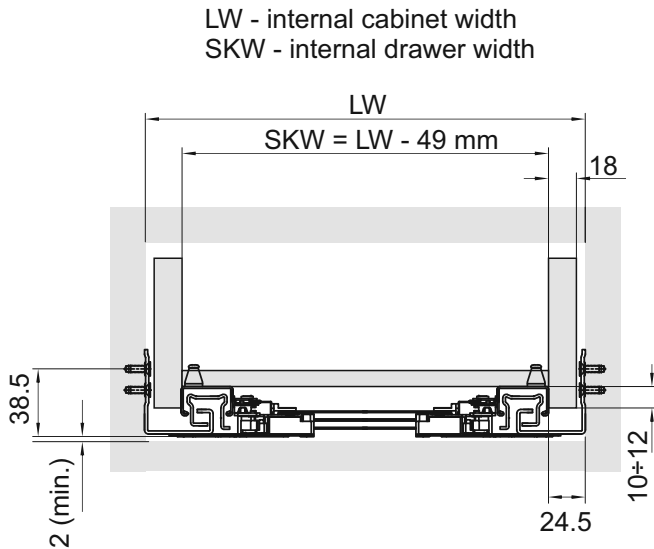

Drawer slide positioning


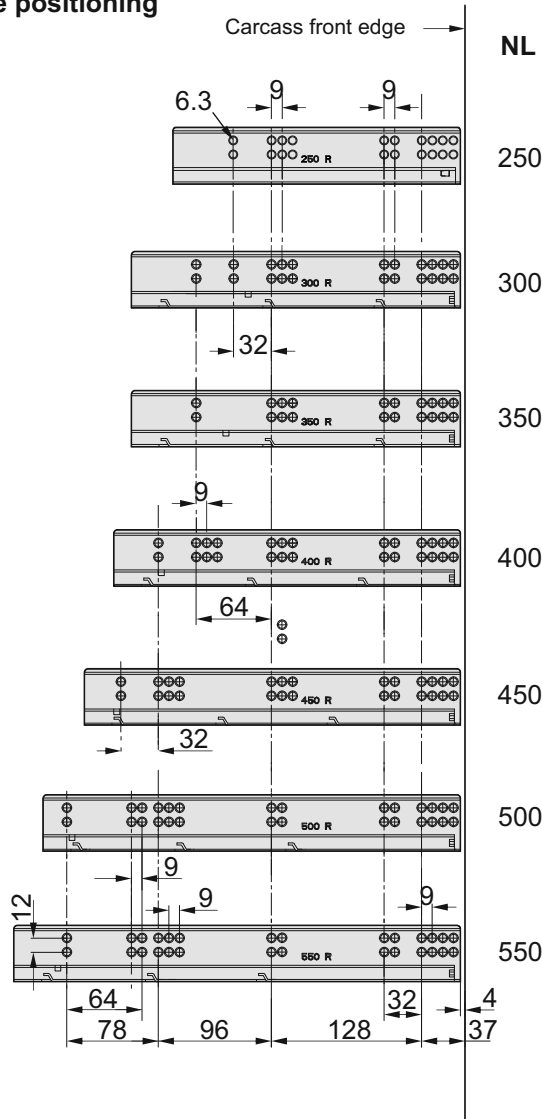


Slide length



NL	250	300	350	400	450	500	550
A	250	280	280	295	320	355	380
B	200	270	320	370	420	470	520

Mounting dimensions for drawers

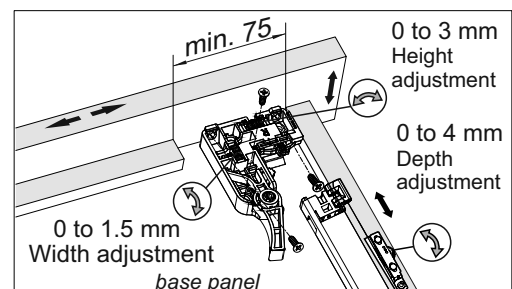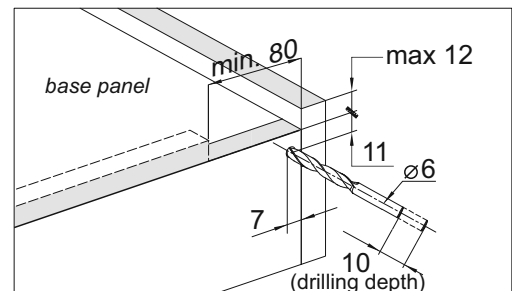


To quickly and accurately drill the holes in the back of the drawers we recommended using our drilling jig for drawers with undermount slides (Code 20415)


Installation of synchronising bar for Platinum PUSH drawer and DXP-D2-3D slide

Fixing of synchronising bar base to DXP-D2-3D slide


Base is included with slide set

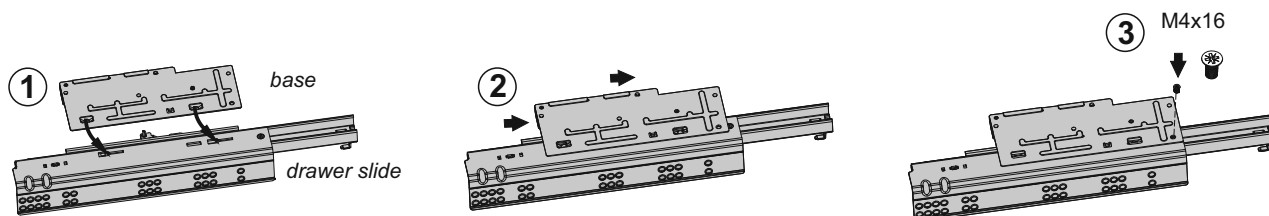

Synchronising bar installation

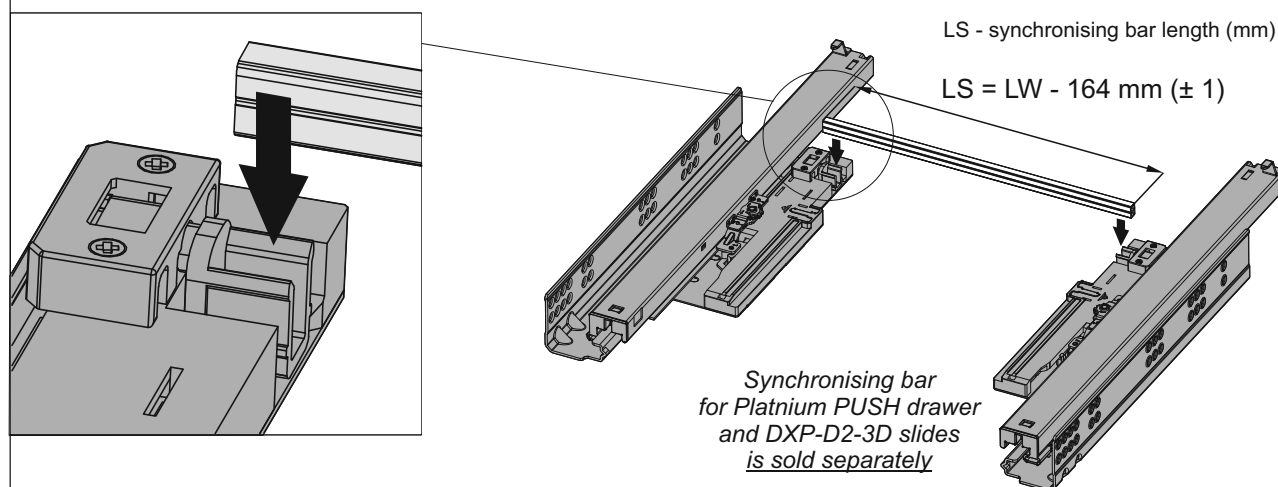

Drawer depth regulation

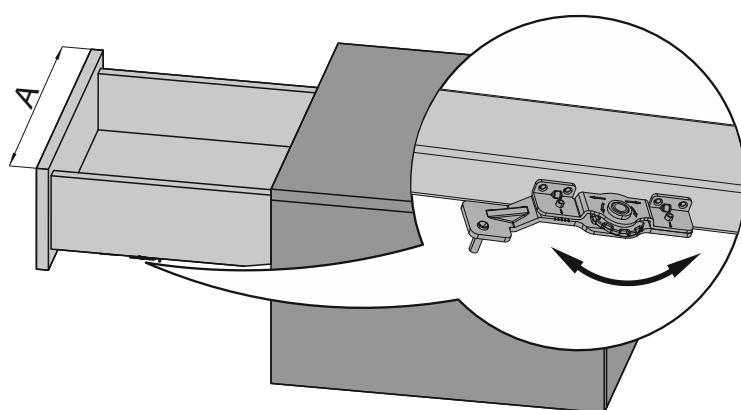

Optimal gap between front and carcass:

$A < 650 \text{ mm}$	- gap (3 to 3.5 mm)
$700 \text{ mm} < A < 900 \text{ mm}$	- gap (4 to 4.5 mm)
$1000 \text{ mm} < A < 1200 \text{ mm}$	- gap (4.5 to 5 mm)

