




# UNDERMOUNT DRAWER SLIDES DXP-D2-3D SYNCHRO

**SEVROLL®**


## WITH PUSH OPEN AND FIXING FOR SYNCHRONISING BAR

Maximum load for slides: 30 kg  
 Slide lengths: 250, 300, 350, 400, 450, 500, 550 mm  
 Height adjustment: 0 to 3 mm  
 Depth adjustment: 0 to 4 mm  
 Width adjustment: 0 to 1.5 mm


NL - nominal length of slide  
 LT - internal cabin depth  
 Drawer side thickness: 18 mm

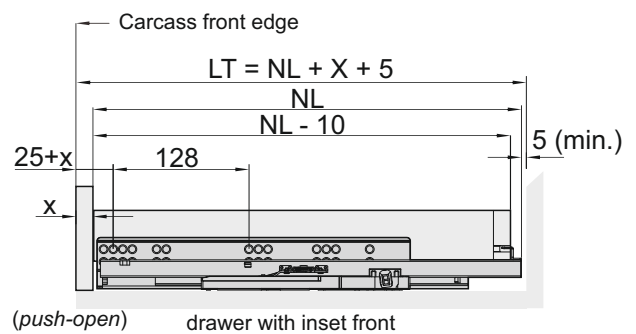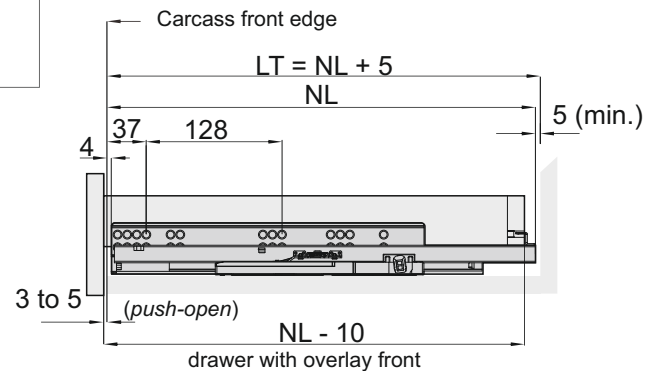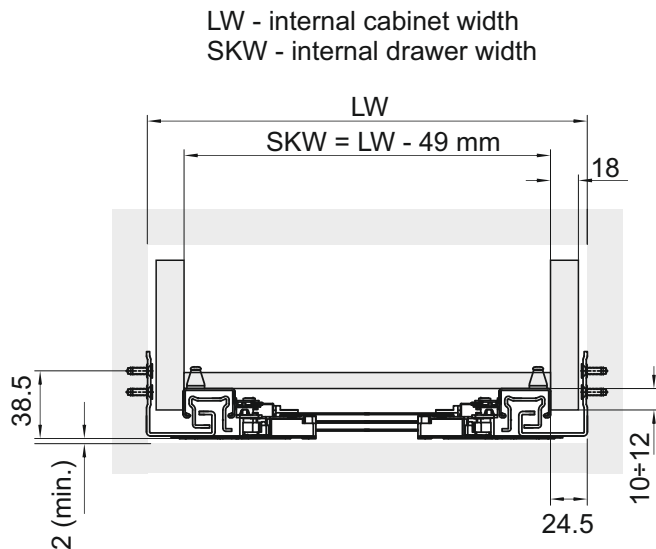

### Drawer slide positioning



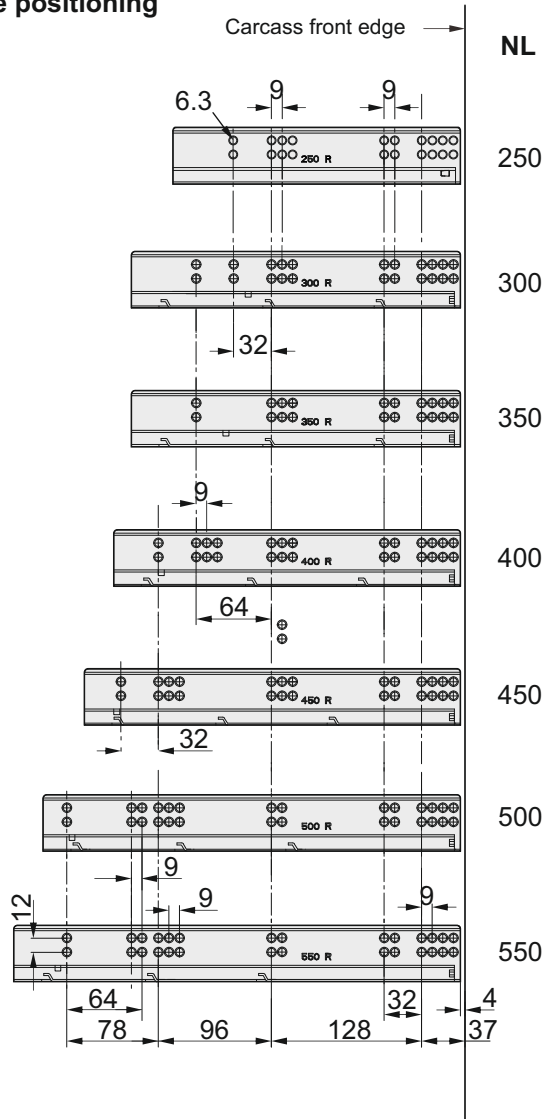


### Slide length



NL	250	300	350	400	450	500	550
A	250	280	280	295	320	355	380
B	200	270	320	370	420	470	520

### Mounting dimensions for drawers

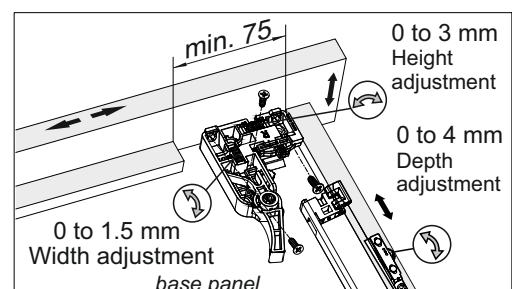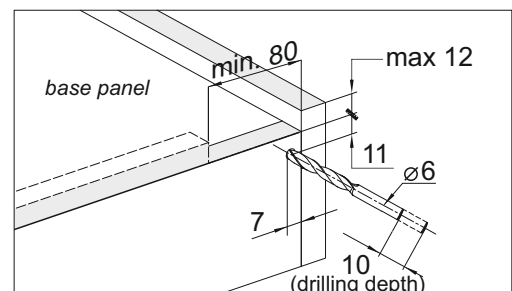


To quickly and accurately drill the holes in the back of the drawers we recommended using our drilling jig for drawers with undermount slides (Code 20415)


### Installation of synchronising bar DXP-D2-3D

#### Fixing of synchronising bar base to DXP-D2-3D slide


*Base is included with slide set*

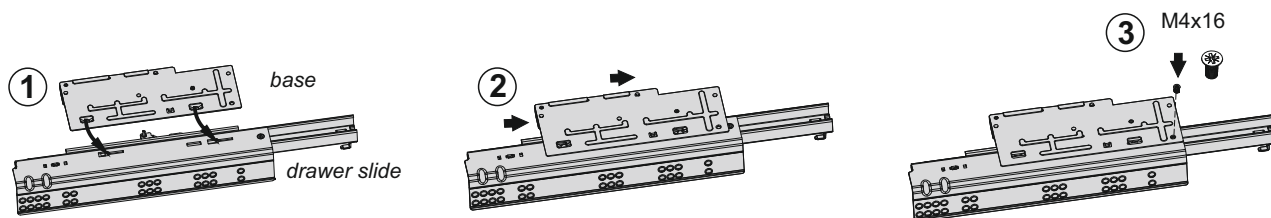

#### Bar installation

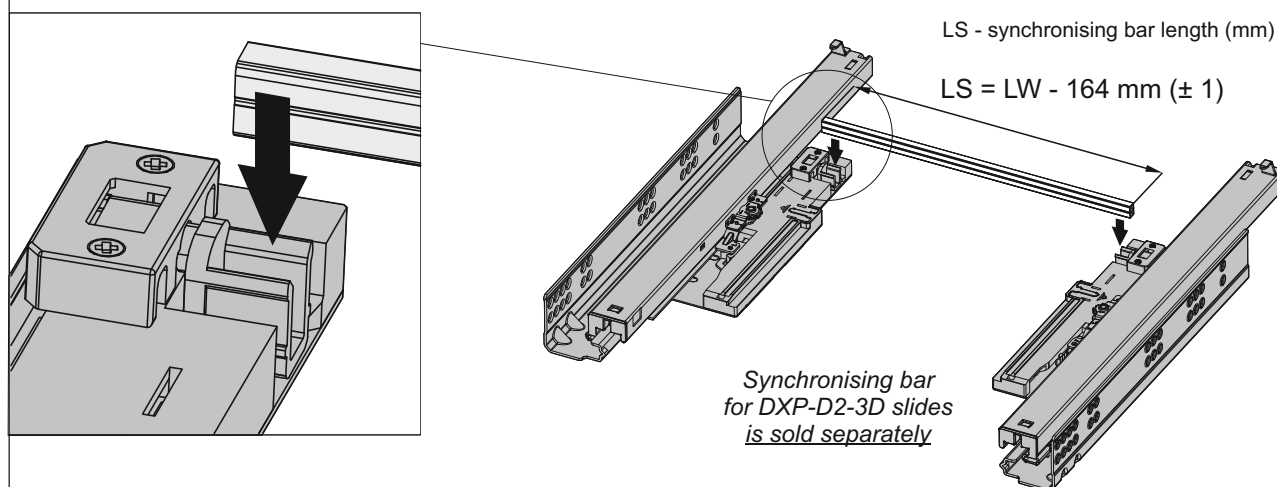

### Drawer depth regulation

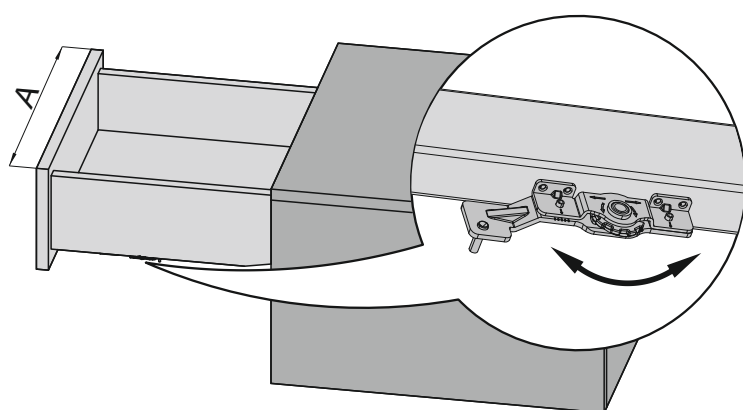

Optimal gap between front and carcass:

$A < 650 \text{ mm}$	- gap (3 to 3.5 mm)
$700 \text{ mm} < A < 900 \text{ mm}$	- gap (4 to 4.5 mm)
$1000 \text{ mm} < A < 1200 \text{ mm}$	- gap (4.5 to 5 mm)

