

COMPONENTS


Handle	
L: 2.70 m 3.00 m	L: 2.70 m
Porto GM	Prosper GM



Top track Exclusive
L: 1.20 m 1.80 m 3.00 m 3.60 m
44 mm


Pathway door set ZPE-18
8x
8x

Spherical stopper

Rubber bump stopper OGUE




Handle length = door height		
	LINE PORTO GM	LINE PROSPER GM
	<p>Handle Porto GM</p>  <p>textile door stop (inserted) 14 mm x 4 mm</p>	<p>Handle Prosper GM</p>  <p>textile door stop (inserted) 14 mm x 4 mm</p>
assumed door width - wz	wz	wz
board height - hb	$hb = H - 64 \text{ mm}$	$hb = H - 64 \text{ mm}$
board width - wb	$wb = wz - 41 \text{ mm}$	$wb = wz - 31 \text{ mm}$

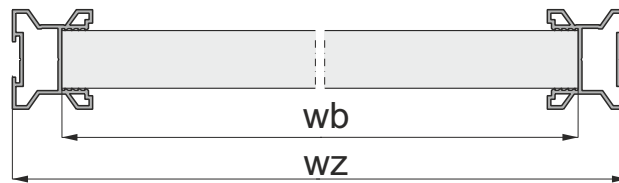


2. Track outside the opening

Side fastening of EXCLUSIVE track
– max. weight of 50 kg per door

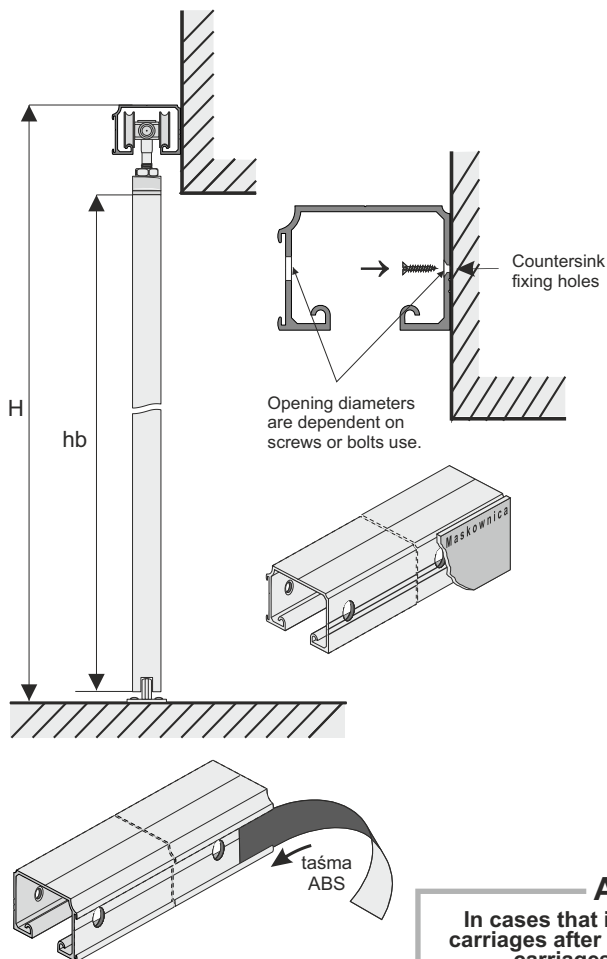

1. Track within the opening

Top fastening of EXCLUSIVE track
– max. weight of 80 kg per door

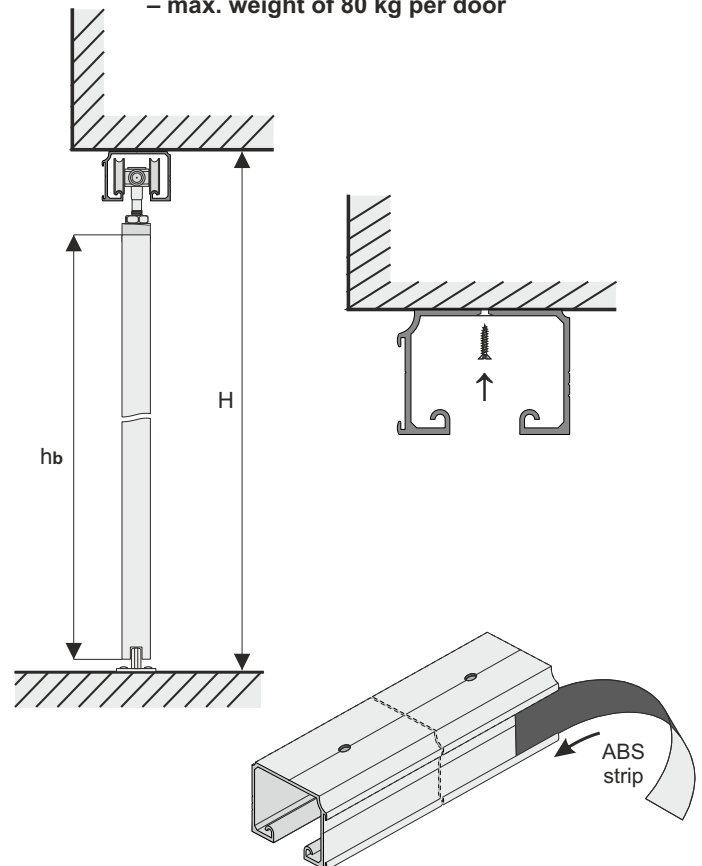

ATTENTION!

In cases that it will not be possible to insert carriages after the installation of the top track, carriages should be inserted prior to track installation.

ATTENTION!

Remove protective film from aluminium elements (handles, tracks, connectors, etc.) prior to cutting them to the desired size. Film removal will reveal quality issues (eg. scratches)