












COMPONENTS

<div>Handle 10-ka II</div> <div>L: 2.70 m</div> <div></div> <div>Textile door stop 14 x 4 mm</div>	<div>Set for pull-apart doors Zr10</div> <div><div>Top hinge</div><div>Bottom hinge</div><div>Hinge seat</div><div>Catch seat</div><div>Magnetic seat</div><div>screws 3x16 (catch seat) - 4 pcs</div><div>Allen key 2</div></div> <div><div></div><div></div><div></div><div></div><div></div><div></div><div></div></div> <div><div>x2</div><div>x2</div><div>x2</div><div>x2</div><div>x2</div><div>x2</div></div>					<div>Horizontal profile Decor 10</div> <div>L: 1.70 m, 2.35 m, 3.00 m</div> <div></div>	<div>Top/bottom track First</div> <div>L: 1.20 m, 1.80 m, 3.00 m, 3.60 m</div> <div></div> <div>22 mm</div>
---	--	--	--	--	--	--	--

You must remember to purchase self-tapping screws to go with each door (4 screws per door).
When using safety glass or mirror, you must also remember to purchase gaskets.



Dimensions of opening

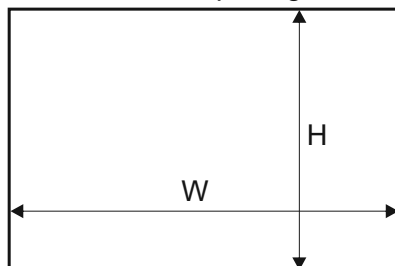


Handle length = door height




Door height		- h	$h = H - 21 \text{ mm}$
Board height		- hb	$hb = h - 93 \text{ mm}$
Single door system	Door width	- w	$w = W - 5 \text{ mm}$
Two door system	Door width	- w	$w = (W - 10 \text{ mm}) : 2$
10 mm board width		- wb	$wb = w - 36 \text{ mm}$
Horizontal profile length		- L	$L = w - 53 \text{ mm}$

Installation method for fitting 10 mm board (diag. A) and 4 mm mirror or glass (diag. B)

- with handle



- with horizontal profile

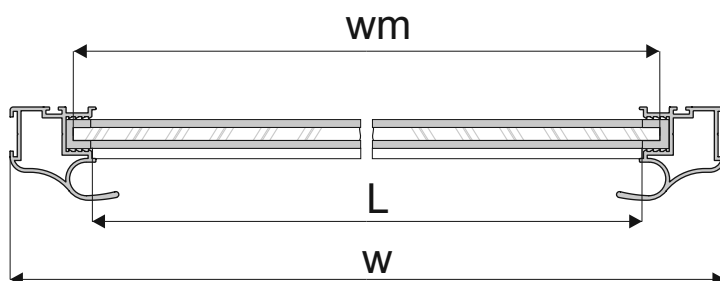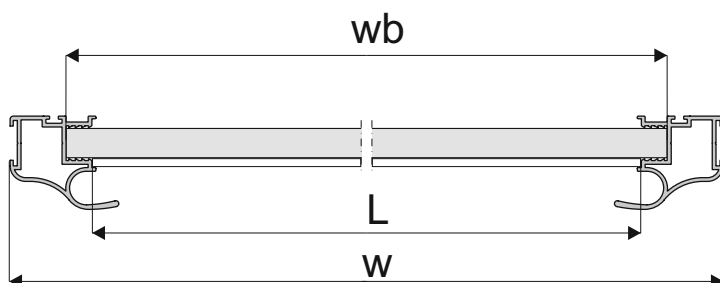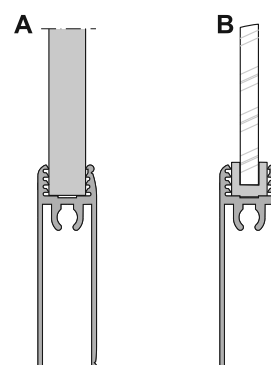

Mirror or safety glass measurements

Mirror height	- hm	$hm = hb - 4 \text{ mm}$
Mirror width	- wm	$wm = wb - 4 \text{ mm}$

ATTENTION!

Mirror (4 mm) should be used with a safety backing film. Safety glass (4.5 mm) comprises of two thin layers with a film in-between. Both mirror and glass need fitting gaskets.

ATTENTION!

Remove protective film from aluminium elements (handles, tracks, connectors, etc.) prior to cutting them to the desired size. Film removal will reveal quality issues (eg. scratches)